
This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| | revisions | | | | | | | |
|-----|-----------|-------------------------|-----------|---------|----------|--|--|--|
| REV | ECR | DESCRIPTION | DATE | INITIAL | APPROVED | | | |
| 1 | | RELEASED FOR PRODUCTION | 5/17/2017 | DPD | JAG | | | |

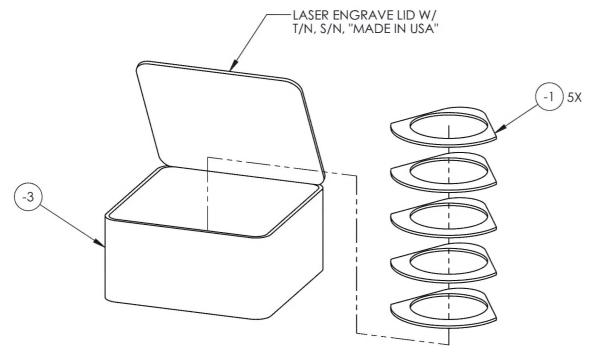


- NOTES: 1. REF. AGUSTA T/N: 3G6205G26351. 2. PART OF KIT RBW6205G21631-3G.


| 2,1,7,111, 01, 111, 112,1102,002,1001, 001 | | | | | | | |
|--|----------------|--|--|--|--|--|--|
| | | RT | | | | | |
| TITLE | LEVER PRO | OTECTION | | | | | |
| DWG NO. RBW6205G26351-3G | | | | | | | |
| MAT'L HEAT | | UNLESS OTHERWISE SPECIF DIMENSIONS ARE IN INCHE | | | | | |
| TREAT FINISH | | .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125/ 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER | | | | | |
| SPEC | | | | | | | |
| DRAWN BY: | DD 05/03/2017 | | | | | | |
| CHECKED: | RJC 05/03/2017 | | | | | | |
| OPPS APPR: AA 05/05/2017 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 | | | | | | | |
| QA APPR: | JL 05/10/2017 | USED ON MODEL | | | | | |
| | | | | | | | |

| | | | | | | | | | 2. DIM | | | IAL LIMITS APPLY | |
|------|-------------|-----|--------|------|------------------|---------------------|--|-----|------------|----------------|--------|------------------|------------------------------|
| | 1000 | | | | | | | | CHECKED: | RJC 05/03 | 3/2017 | AFTER PLA | |
| ASSY | ASSY QTY | B/O | Part # | UNIT | Description | Material | B/O INFORMATION OR SPECIFICATIONS | PG. | OPPS APPR: | AA 05/05 | /2017 | ASME Y14. | T DIM AND TOL PER 5M-2009 |
| Q.I. | Q | | | QII | | | | | QA APPR: | JL 05/10/2 | 2017 | | USED ON MODEL |
| | | | -1 | 5 | LEVER PROTECTION | WHITE DELRIN/ACETAL | | 2 | APPROVED: | JAG 05/17/2017 | | AW139 | |
| | | B/O | -3 | 1 | CONTAINER | PLASTIC | 2.75 X 2.75 X 1.35 (ESD PLASTIC CONTAINERS #FT-33) | 1 | SCALE | 2:3 | DATE (| 5/3/2017 | SHEET 1 OF 2 |
| | | | | | | | | | | | | | |

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| | REVISIONS | | | | | | | | |
|-----|-----------|-------------|------|---------|----------|--|--|--|--|
| REV | ECR | DESCRIPTION | DATE | INITIAL | APPROVED | | | | |

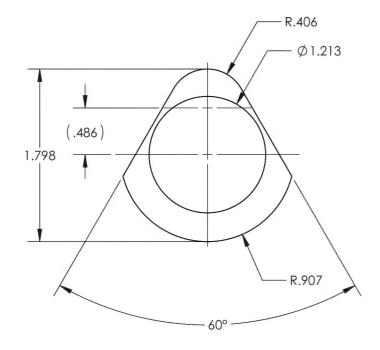





LEVER PROTECTION

RBW6205G26351-3G-1

| MAT'L WHIT | E DELRIN/AC | ETAL | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | | | | |
|--------------------------|----------------|------|---|--|--------------|--|--|--|
| HEAT TREAT | | | .XXX ± .005 FRACTIONS ± 1/8 | | | | | |
| FINISH | | | .XX ± .01 ANGLES ±.5° .X ± .1 SURFACES = 125/ | | | | | |
| SPEC | | | 1. BREAK ALL SHARP EDGES | | | | | |
| DRAWN BY: | DD 05/03/2017 | | | .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | | | | |
| CHECKED: | RJC 05/03/2017 | | | | | | | |
| OPPS APPR: AA 05/05/2017 | | | | 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009 | | | | |
| QA APPR: | JL 05/10/2017 | | | USED ON MODEL | | | | |
| APPROVED: | JAG 05/17/2017 | | | AW139 | | | | |
| SCALE | 1:1 DATE 5/ | | | 3/2017 | SHEET 2 OF 2 | | | |

REV 1

(-1)

LEVER PROTECTION